


# LSS

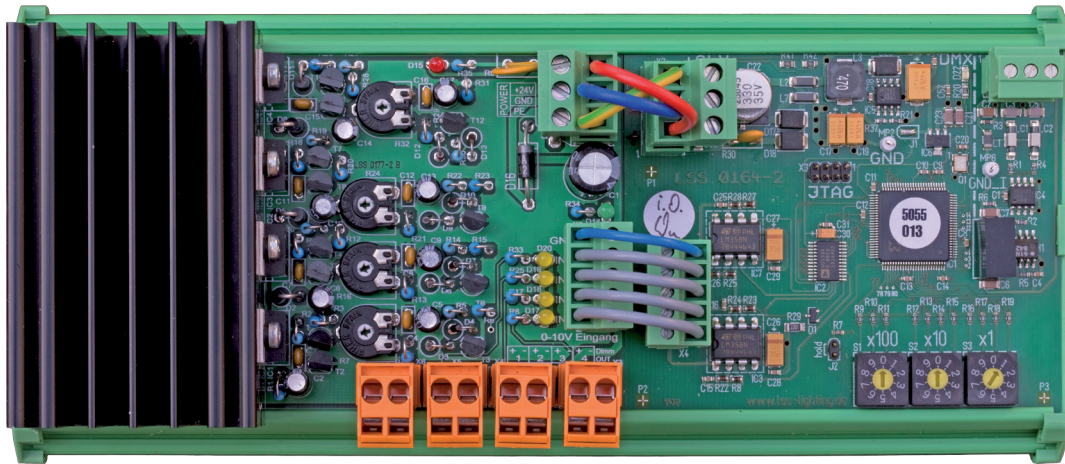

## 4 channel KBL Dimmer

Power supply with DMX control for LSS LED blue lights KBL version 24N

### Features:

- power supply for a maximum of 37 blue lights KBL version 24N
- DMX512 input opto-insulated
- DMX-protocol detection by signal analysis
- setting the switching behavior on loss of DMX signal ("hold" or "off")
- DMX control and fine tune for each output separately
- linear regulators, no separate EMC protection necessary
- ready for 35mm DIN rail TS

<b>DMX-input</b>	1x PHOENIX connector / potential separation by optocouplers
<b>Outputs</b>	4x PHOENIX connectors, 2,5mm <sup>2</sup>
<b>Indications</b>	DMX: LED yellow Power: LED green Overload: LED red Output Level: LED yellow
<b>Power supply</b>	20...28V DC / max. 0,75A
<b>RoHs-conform</b>	yes
<b>Dimensions</b>	W x D x H 205 x 72 x 90mm
<b>Weight</b>	0,4 kg
<b>Order number</b>	5058