

# LSS



## **Dimmer Duct 250 x 140**

The modular design of the LSS Dimmer Duct 250 x 140 allows a dimming system within a duct system. The inside of the duct is prepared for circuit boards, which can be fixed by slots and/or screw fastenings. The duct is used as a heat sink for the dimmer modules, which surface is magnified by the large cooling fins at the bottom. The cover opens downwards and in a specific angle, it can be removed. On the cover are two sections, one for devices and another for connectors. They can be placed according to your needs.

The LSS Dimmer Duct 250 x 140 and Multifunctional Duct 250 x 140 have the same profile. Both ducts have mounting rails on the sides and the backside. So the ducts can be connected so that they form a visual and technical unit. A combined duct can include segments of dimmer and multifunctional ducts, depending on the need. The length of such a duct is practically limited only by the structural conditions.

The LSS Dimmer Duct 250 x 140 can be completed with ends with bar handles. They can be used as handles or as a strain relief to protect the cables and the connectors for shearing and bending. Many other accessories can be found in the product catalog Duct Profiles.


The LSS Dimmer Duct 250 x 140 is made of extruded aluminum and comes black anodized. Other colors are available upon request.

Part	Dimensions	Weight	Order Number
Duct 250 x 140	250 x 140 x 4000 mm	10,18 kg/m	L04018
Top Cover 250 x 140	225 x 62,39 x 1000 mm	3,58 kg/m	L04020
End caps 250 x 140	250 x 210 x 9,5 mm	1,0 kg	L04021
Connectors	Big: 200 x 22 x 10 mm	0,35 kg	L04025
	Small: 100 x 11,85 x 4 mm	0,04 kg	L04026
Accessories	Top screws M4x12		L04027

More accessories can be found in the product catalogue channel Duct Profiles.

### **Dimmer Duct 250 x 140**

#### **Duct section view**

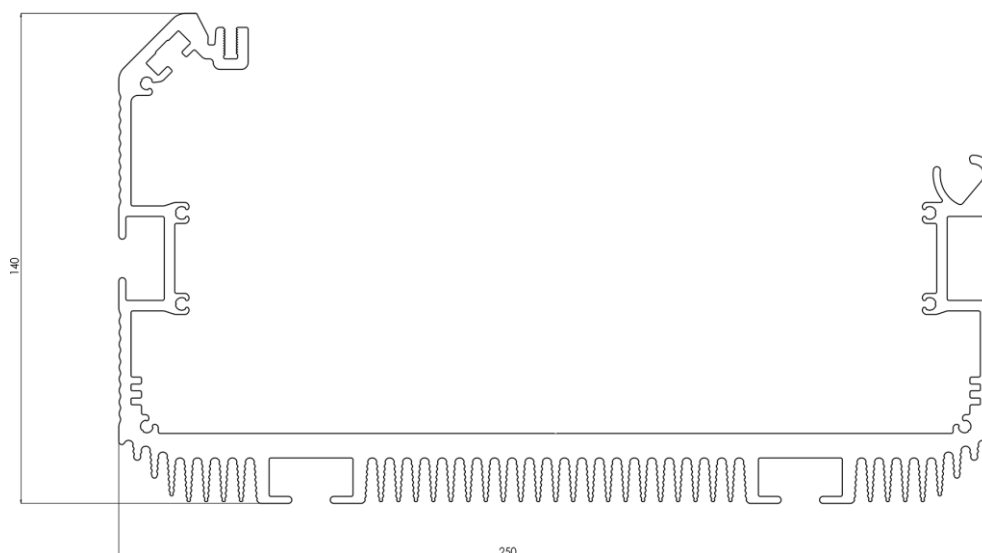

#### **Cover section view**

