

# LSS



## Patch Panel

The LSS Patch Panel is a non-populated carrier for up to 24 Keystone modules for 19 " rack systems. In the stainless steel module holder, the modules can be locked individually. To protect against dust, the contacts of RJ45 modules are overhead. The module fields are numbered on the blue powder-coated front panel. Individual labels can be attached above the module fields. On the back the Patch Panel has a cable clamp for each module for optimal strain relief and cable management. The carrier consists of sheet steel with a potential equalization connection. The modules are automatically grounded when engaged. Dust covers in black are available as accessories.


### Technical Specifications:

<b>Design</b>	19 " slot with 1 U
<b>Max. number of keystone modules</b>	24, individually equippable RJ45 contacts overhead
<b>Max. height of labels above plug connector</b>	12mm
<b>Material</b>	sheet steel
<b>Front panel</b>	Blue powdered
<b>Potential equalisation</b>	200mm grounding cable enclosed
<b>RoHS</b>	Compliant
<b>Dimensions (W x H x D in mm)</b>	482,6 x 44,05 x 101,5
<b>Weight</b>	700g unpopulated
<b>Optional accessories</b>	Dust covers, black
<b>Order number</b>	L03012

Licht-, Steuer- und Schaltanlagenbau GmbH • Am Eichenberg 1 • D-04600 Altenburg/Germany  
Phone: +49 3447 835500 • Fax: +49 3447 861779 • mail@lss-lighting.de • www.lss-lighting.de

## Draws

### Front

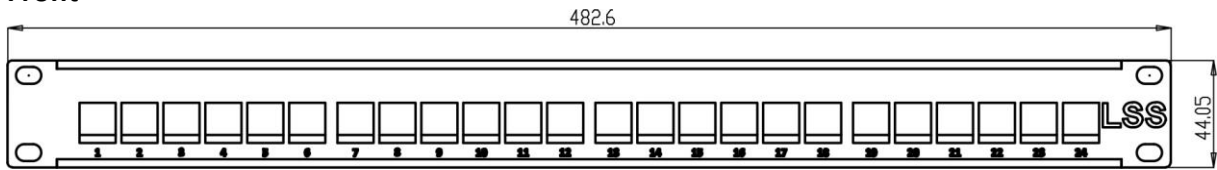

### Back



### Top view

